

JAMMU MUNICIPAL CORPORATION

Trikuta Division

Fresh Tender Notice Inviting e-Tender

For and on behalf of The Commissioner, Municipal Corporation, Jammu. The Executive Engineer, Trikuta Division, Municipal Corporation, Jammu invites online tenders from registered class of contractors / Firms as per the prescribed format for the following works.

The online / e-tenders along with the scanned CDR and other documents should be uploaded on or before 06.02.2017 up to 1400 Hrs. The original instruments should be submitted in the office of Executive Engineer, Trikuta Division, Jammu Municipal Corporation, Jammu, by Registered post only, well before the bidding date. The CDR is to be pledged to the Executive Engineer-T, Jammu Municipal Corporation.

Other details and terms /Conditions are contained in the NIT and can be seen and downloaded from the Site [www. jktenders.gov.in](http://jktenders.gov.in).

e.NIT No.	Particulars	Apx. Cost (In Lacs)	Earnest Money (in Rupees)	Cost of Tender Document (in Rupees)	Class Of Cont.	Time Of Comp.
417 bt	CONSTRUCTION OF LANE/DRAIN FROM H/O GURMEET SINGH TO PLOT OF VIKAS JAIN OPP. BEAUTY PARLOUR AND H/O MOHAN LAL TO ATUL SHARMA & TILE WORK NEAR NEW JYOTI SCHOOL ALONG WITH BLACK TOPPING AT FRIENDS COLONY WARD NO. 52. (Excluding cost of Paver Tiles).	9.33	18660	600/	ABCD	120 Days
418 bt	CONSTRUCTION OF DRAIN, FOOTPATH AND LAYING OF MARBLE NEAR SHRI LAKSMI NARAYAN TEMPLE AT GANDHI NAGAR WARD NO. 20	5.00	10000	600/	ABCD	30 Days

TERMS & CONDITIONS:


1. Tenders without CDR are liable for cancellation.
2. Prior to bidding sales tax clearance certificate of the proceeding year issued by sales Tax Deptt. must be uploaded and enclosed with the hard copy.
3. The bids shall be uploaded in electronic format on the website <http://jktenders.gov.in>.
4. The original instrument in respect of CDR & others must be delivered to Executive Engineer, Trikuta Division through by Registered post/Speed post / courier or by hand. On or before due date.
5. The Department Reserves the right to disqualify any bidder who even uploads the bid documents but without submitting the original instrument in the office in time.
6. Registration card should have been renewed for the year 2016-17 well before the Date & receipt of tender, if not the same shall be entertained only after production of proof of remittance of renewal fee in the concerned office (Ref. to GR).
7. In case the amount / rate quoted by the tenderer / bidder is less than 15% of the advertised amount the bidder shall upload and enclosed an additional security deposit in shape of CDR @ 5% of the advertised amount at the time of initial bidding. Bids which fall in the above category & are not accompanied by the necessary additional security deposit shall be straightaway rejected.
8. Photocopies of pan card, registration card and sales tax should be self attested or attested by the Gazetted officer.
9. If the quoted rates are 40% below then the rates advertised it will be considered as non responsive bid and will not be considered.

No.: MJ/Tech/T/

Dt:

Copy to the:

1. Commissioner, Jammu Municipal Corporation for information
2. Joint Commissioner (W), Jammu Municipal Corporation for information
3. Chief Accounts Officer, Jammu Municipal Corporation for information
4. AEE (Concerned), Jammu Municipal Corporation for information.
5. A.A.O for information.
6. H.D for information
7. I/C e.tendering JMC for information and necessary action.


Executive Engineer-(T)
Jammu Municipal Corporation.

ADVERTISED RATE LIST FOR CONSTRUCTION OF DRAIN, FOOTPATH AND LAYING OF MARBLE NEAR SHRI LAKSMI NARAYAN TEMPLE AT GANDHI NAGAR WARD NO. 20


ADVERTISED COST: Rs. 5.00 Lacs

Time of Completion: 30 Days

Sr. No.	Description	Unit	Qty.	Rate
1.	Dismantling stone slab flooring laid in cement mortar including stacking of serviceable material and disposal of unserviceable material within 50 metres lead.	Sqm	138.47	89.30
2.	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 m lead.1:3:6 or richer mix.	Cum	2.00	813.85
3.	Removal of *Excavated mulba dismantled unserviceable material from the site of work by mech. Transport / Animal Transport or otherwise including loading complete job.	Cum	18.21	130.00 LMR
4.	Providing & laying in position cement concrete of specified grade excluding the cost of centering & shuttering -All work up to plinth level.1:3:6(1 Cement: 3 Coarse sand: 6graded stone agg. 20mm nominal size) • Crushed	Cum	8.20	3707.40
5.	Marble stone flooring with 18mm thick marble stone (Sample of marble shall be approved by Engineer-In-Charge) over 20mm (Average) thick base of cement mortar 1:4 (1 cement: 4 coarse sand) laid and jointed with grey cement slurry including rubbing and polishing complete with. Makrana White Second quality.	Sqm	162.45	2344.85
6.	• Extra for nosing in marble stone flooring in treads	RMtr.	65.24	294.55
7.	Carriage of materials by mechanical transport including loading, unloading & stacking complete. ➤ Sand for an average distance of 4 kms ➤ Stone aggregate. Crushed for an average distance of 7 kms	Cum Cum	3.69 7.38	117.14 144.96

Note: 1) Any item or items beyond the above advertised rate list / quantity schedule if found necessary during the execution of the said work the same shall be paid as per SSR of 2012 subject to the contractors appreciation / Depreciation for the items beyond the advertised rate list.
2) Any typographical error if found in the above rate list / quantity schedule the same shall be corrected accordingly & shall be paid as per SSR of 2012 with the contractors appreciation / Depreciation.

A.E.E


 Executive Engineer,
 Municipal Corporation Division (T),
 Trikuta Complex Dogra Hall
 Jammu.

ADVERTISED RATE LIST FOR CONSTRUCTION OF LANE/DRAIN FROM H/O GURMEET SINGH
 (1) PLOT OF VIKAS JAIN OPP. BEAUTY PARLOUR AND H/O MOHAN LAL TO ATUL SHARMA
 (2) TILE WORK NEAR NEW JYOTI SCHOOL ALONG WITH BLACK TOPPING AT FRIENDS COLONY
 WARD NO. 52.

ADVERTISED COST: Rs. 9.33 Lacs.(excluding cost of Paver Tiles).

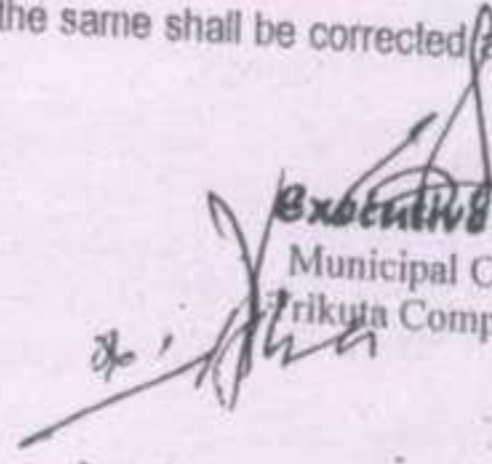
Time of Completion: 120 Days

Sr. No.	Description	Unit	Qty.	Rate
1.	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 m lead.1:3:6 or richer mix.	Cum	15.61	813.8
2.	Providing & laying in position cement concrete of specified grade excluding the cost of centring & shuttering -All work up to plinth level. 1:5:10 Cement: 5 Coarse sand: 10graded stone agg. 40mm nominal size).. Crushed	Cum	5.84	2750.4
3.	Providing & laying in position cement concrete of specified grade excluding the cost of centring & shuttering -All work up to plinth level.1:3:6(1 Cement: 3 Coarse sand: 6graded stone agg. 20mm nominal size) • Crushed	Cum	22.20	3707.4
4.	Dumping / filling of stones including cost of stones. In horizontal on level.	Cum	4.45	327.0
5.	Providing & laying in position cement concrete of specified grade excluding the cost of centring & shuttering -All work up to plinth level. 1:2:4(1 Cement: 2 Coarse sand: 4graded stone agg. 40mm nominal size) Crushed.	Cum	2.12	4575.5
6.	12mm Cement plaster of mix. • 1:6(1cement :6Fine sand)	Sqm	118.49	141.0
7.	Providing under layer including preparation of ground 75mm thick (un compacted) layer of dry stone aggregate & grouted with sand. (Complete Job).	Cum	4.35	1600.0 LMR
8.	fixing of precast cement concrete paver tiles flooring 60 mm thick cement mortar 1:4 mix & joints to be filled with cement mortar 1:3 mix (Complete Job).	Sft	960.00	50.00 LMR
9.	Providing and applying tack coat using hot straight run bitumen of grade 80/100 including heating the bitumen, spraying the bitumen with mechanically operated spray unit fitted on bitumen boiler, cleaning and preparing the existing road surface as per specifications. On WBM @0.75KG per Sqm.	Sqm	2230.48	54.30
10.	2 cm premix carpet surfacing with 1.8cum and 0.90cum of stone chippings of 13.2 mm size and 11.2 size respective per 100sqm and 52kg and 56kg of hot bitumen per cum of stone chippings of 13.2 mm and 11.2 mm size respectively including tack coat with hot straight run bitumen including consolidation with road roller of 6 to 9 tonne capacity etc complete (tack coat to be paid for separately) With paving Asphalt 80/100 heated and then mixed with solvent at the rate of 70 grams per KG of Asphalt.	Sqm	2230.48	143.40
11.	Providing and laying seal coat of premixed fine aggregate (passing 2.36 mm and retained on 180 microns sieve) with bitumen using 128 KG of bitumen of grade 80/100 bitumen per cum of fine aggregate and 0.60 cum of fine aggregate per 100 sqm of road surfaces including rolling and	Sqm	2230.48	70.70

12.	ishing with road all complete.			
12.	entering & shuttering (form work) incl. strutting propping etc. & removal of form work for foundation, footing, basis of columns etc. for mass concrete.	Sqm	83.64	179.25
13.	Carriage of materials by mechanical transport including loading, unloading & stacking complete. ➤ Sand for Average Distance 4 Km.	Cum	28.34	117.14
14.	Carriage of materials by mechanical transport including loading, unloading & stacking complete. ➤ Stone aggregate below 40mm Nominal size Crushed for an average distance of 7 kms.	Cum	44.65	144.96
15.	Carriage of materials by mechanical transport including loading, unloading & stacking complete. ➤ Stone for an average distance of 4 kms	Cum	4.45	137.81

- " The quantities shall be executed as per necessity at site only.
- " Any item or items beyond the above advertised rate list / quantity schedule if found necessary during the execution of the said work the same shall be paid as per SSR of 2012 subject to the contractors appreciation / Depreciation for the items beyond the advertised rate list.
- " Any typographical error if found in the above rate list / quantity schedule the same shall be corrected accordingly & shall be paid as per SSR of 2012 with the contractors appreciation / Depreciation.

A.E.E


 Executive Engineer,
 Municipal Corporation Division (T),
 Trikuta Complex Dogra Hall Jammu
 26.11.16